Martin Lishman

Compact Sprayers



















Compact Sprayers for Agriculture, Amenity and Horticulture

ATV Sprayers



Mini-Spray MS009 - with 2.5m 6-nozzle 3-section folding boom and hand lance

A PRACTICAL ALTERNATIVE to knapsack spraying

The Mini-Spray range of ATV mounted sprayers is suitable for many small spraying jobs including spot treatments, field margins, crop stores, paths, paddocks, sports turf, amenity areas and large gardens.

Key Features

- **70 litre tank**, easily mountable on ATV rack with ratchet straps supplied
- **Compact dimensions** keep the sprayer within the width of most vehicles
- Choice of 4 models with 3 different boom lengths from 1m to 2.5m
- Air Bubble Jet reduced drift nozzles and stainless steel spray lines as standard
- Hand lance with 6m hose as standard, with optional retracting hose reel

70 litre tank




- UV stabilised 6mm thick polyurethane tank
- Fill level indicator with 10% overfill allowance
- Integral sump for easy draining
- Separate base to protect pump
- In-line filter and drain valve
- Shaped tank for wrap-around of hand lance hose
- Quick-release ratchet straps

Control at your fingertips

- Electric controls fitted to the Mini-Spray ATV sprayers allow the pump and optional bout marker to be operated from a seated position.
- Mini-Spray ATV sprayers with a boom are supplied with a choice of manually operated spray on/off valve or 3-section valve block with pressure regulation and agitation.





Boom and Hand Lance Features and Options

Hand Lance Options



600mm hand lance with 6m hose (standard with all ATV models)



9m Retracting Hose Reel with 600mm hand lance for fitting to ATV frame or rack. (Mini-Spray MS009 only)



1 metre 3-nozzle spray boom with mountings (standard with the Mini-Spray MS001)

2 metre 5-nozzle folding spray boom with mountings (standard with the Mini-Spray MS006)

All Mini-Spray booms (except 2m) are fitted with stainless steel spray lines and single-turret nozzle bodies with independent shut-offs and Air Bubble Jet reduced drift nozzles.

Please see back pages for the options available for each model.



2.5 metre 6-nozzle spray boom with height adjustment, spring-loaded break-backs and universal base frame (standard with the Mini-Spray MS009)



Demount Sprayers

A COMPLETE self-contained UTILITY vehicle spray system

The Mini-Spray and Midi-Spray range of 12v or engine-powered demount sprayers is a complete self-contained spraying system for mounting on utility vehicles, pick-up trucks and other suitable vehicles.

Key Features

- Demountable tank mounting frame and • vehicle attachment fittings
- Compact dimensions keep the sprayer within the width of most vehicles
- Easy removal allows vehicles to be kept completely universal
- Choice of 3 models with 4 boom lengths from 2.5 to 6m, adjustable to suit the tailgate
- Air Bubble Jet reduced drift nozzles and stainless steel spray lines as standard



Mini-Spray Demount 125 litre with 2.5m 6-nozzle 3section folding boom and hand lance



Tank Options



125 litre Mini-Spray tank




250 litre Midi-Spray tank



350 litre Midi-Spray tank

Comprehensive control options

- Mini-Spray 125 litre Demount sprayers with a boom are supplied with: * remote switchbox to allow the pump and optional bout marker to be operated from the cab
 - * 3-section valve block with pressure regulation and agitation
- Midi-Spray 250 and 350 litre Demount sprayers with a boom are supplied with a choice of:
 - * in-cab switch box to operate pump and optional bout marker and manually operated 3-section valve block with pressure regulation and agitation
 - * full electric control from the cab for boom section shut offs, agitation, pressure regulation and optional bout marker

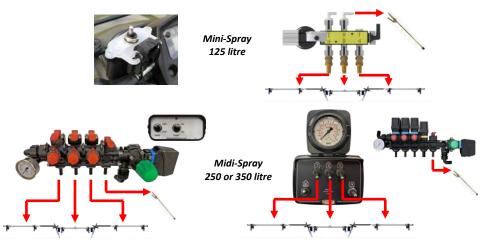

Boom and Hand Lance Options

All Demount Sprayer booms are fitted with stainless steel spray lines and single-turret nozzle bodies with independent shutoffs and Air Bubble Jet reduced drift nozzles. Please see back pages for the options available for each model.



2.5 or 3.5 metre spray boom with height adjustment, spring-loaded break-backs and adjustable fitting staple (for Mini-Spray 125 litre Demount)



4 or 6m 3-section folding spray boom with height adjustment and break-backs. Optional heavy duty version has anti-sag adjustment. (for Midi-Spray 250 or 350 litre Demount)



600mm hand lance with 6m hose or 9m **Retracting Hose Reel**

Tractor Mounted Sprayers

A VERSATILE range of tractor mounted sprayers

The Mini-Spray and Midi-Spray range of 12v or PTO-driven tractor mounted sprayers is suitable for a wide range of agriculture, horticulture, sports turf and amenity spraying jobs with compact and standard tractors.

Key Features

- 3-point linkage and free-standing tank mounting frame
- Compact dimensions keep the sprayer within the wheelbase of the tractor
- Mini-Spray available with 2 tank sizes (70 and 125 litre) and 3 boom lengths from 1 to 3.5m
- Midi-Spray available with tank sizes from 200 to 600 litre and 3 boom lengths from 4 to 8m
- Midi-Spray models are available with Standard or PRO specification features

Tank Options





70 or 125 litre Mini-Spray tank






200, 300, 400, 500 or 600 litre Midi-Spray tank



A full range of control options

- Mini-Spray 70 and 125 litre Tractor Mounted sprayers are supplied with: * remote switchbox to allow the pump and optional bout marker to be operated from the cab * 3-section valve block with pressure regulation and agitation (2.5m and 3.5m booms only)
- Midi-Spray 200 to 600 litre Tractor Mounted sprayers are supplied with a choice of:
 - * in-cab switch box to operate pump and optional bout marker and manually operated 3-section balanced valve block with pressure regulation and agitation
 - * full electric control from the cab for boom section shut offs, agitation, pressure regulation and optional bout marker

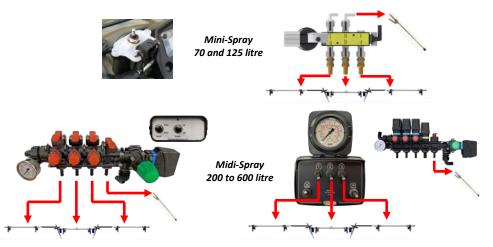

Boom and Hand Lance Options

All Tractor Mounted Sprayer booms are fitted with stainless steel spray lines and single-turret nozzle bodies with independent shut-offs and Air Bubble Jet reduced drift nozzles. Please see back pages for the options available for each model.



1m, 2.5 or 3.5 metre spray boom with boom mountings (all) and spring-loaded break -backs (2.5 and 3.5m) (for Mini-Spray 70 and 125 litre Tractor Mounted)



4, 6 or 8m 3-section folding spray boom with height adjustment and break-backs. Optional heavy duty versions have anti-sag adjustment. (for Midi-Spray 200 to 600 litre Tractor Mounted)



with 6m hose or 9m **Retracting Hose Reel**

Trailed Sprayers

Suited to a WIDE RANGE of vehicles and spraying jobs

The Mini-Spray and Midi-Spray range of 12v or engine powered trailed sprayers are ideal for towing behind ATVs, UTVs, compact tractors, ride-on mowers and other suitable vehicles and many spraying jobs, large or small.

Key Features

- **Trailed** chassis, adjustable height boom mountings, trailer coupling and LGP tyres
- **Compact dimensions** keep the sprayer within the width of most vehicles
- Mini-Spray available with 2 tank sizes (70 and 125 litre) and 2 boom lengths (2.5 or 3.5m)
- Midi-Spray available with 250 litre tank and 3 boom lengths from 4 to 8m
- Midi-Spray models are available with Standard or PRO specification features




Mini-Spray Trailed 125 litre with 2.5m 6-nozzle 3-section folding boom and retracting hose reel with hand lance

Midi-Spray Trailed 250 litre with heavy duty 4m 3-section folding boom and retracting hose reel with hand lance



- Mini-Spray 70 and 125 litre Trailed sprayers with a boom are supplied with:
 * remote switchbox to allow the pump and optional bout marker to be operated from a seated position
 - * manually operated 3-section valve block with pressure regulation and agitation
- Midi-Spray 250 Trailed sprayers with a boom are supplied with a choice of:
 remote in-cab switch box to operate pump and optional bout marker and manually operated 3-section valve block
 - with pressure regulation and agitation * full electric control from the cab for boom section shut offs, agitation, pressure regulation and optional bout marker

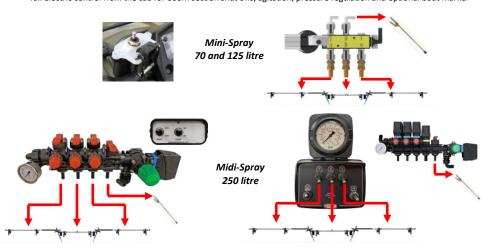

Boom and Hand Lance Options

All Trailed Sprayer booms are fitted with stainless steel spray lines and single-turret nozzle bodies with independent shut-offs and Air Bubble Jet reduced drift nozzles. Please see back pages for the options available for each model.



2.5 or 3.5 metre spray boom with spring-loaded break-backs (for Mini-Spray 70 or 125 litre Trailed)



4, 6 or 8m 3-section folding spray boom with height adjustment and break-backs. Optional heavy duty versions have anti-sag adjustment. (for Midi-Spray 250 litre Trailed)



600mm hand lance with 6m hose or 9m Retracting Hose Reel

www.martinlishman.com



Tank Options



70 or 125 litre Mini-Spray tank



250 litre Midi-Spray tank

Pedestrian Sprayers

Combining CONTROL and POWER with responsive EASY HANDLING

Designed for all types of sports grounds, golf courses and landscaping work, the Micro-Spray self-propelled pedestrian sprayer is probably the most compact and yet sophisticated of its type available, with many refinements and extra features built in.

Key Features

- Low ground pressure to prevent compaction and turf damage
- Low centre of gravity and weight balance to ensure manoeuvrability and stability
- Narrow footprint to tackle gateways, passageways and hard-to-reach areas
- Ergonomic steering handle with trigger throttle and spray on/off for precise control
- Adjustable motor speed and direction to give the operator total spraying control
- **Power supplied** by dual deep cycle batteries to give up to 4 hours continuous use
- Available with 120 litre tank and choice of 2.5 or 3.5m adjustable height folding boom

You have control...

Ergonomic steering and control handle provides a simple trigger throttle system and spray on/off buttons for precise fingertip control of spraying. An emergency-stop wrist lanyard improves safety should the operator become separated from the sprayer. 7

Easy-to-use control box allows operators to change direction to either walk behind or in front of the sprayer at up to 12 motor speeds and adjust the pump pressure to suit. Speed is maintained irrespective of terrain or tank weight and the motor brakes automatically if the control handle trigger switch is released.

3-section valve block with pressure regulation and agitation supplies the 2.5m or 3.5m boom. Spray application rates, pump pressure, bout marker selection and a battery level indicator can be accurately and quickly controlled or viewed by the operator.



Boom and Hand Lance Options

All spray booms are fitted with stainless steel spray lines and single-turret nozzle bodies with independent shut-offs and Air Bubble Jet reduced drift nozzles. Please see back pages for the options available for each model.



2.5 or 3.5 metre spray boom with springloaded break-backs



600mm hand lance with 6m hose or 9m Retracting Hose Reel









The Micro-Spray pedestrian sprayer is a versatile sprayer suited to many different spraying situations - such as golf courses, school playing fields, football stadiums and rugby pitches







Compact Sprayer Details and Specifications

ATV Sprayers

Mini-Spray Basic (Product Code: SP/Basic)

70 litre tank: 4 l/min 12v demand pump: 2m cable for wiring to ATV electrics; hand lance with 6 metre hose; fixing straps

Mini-Spray MS001 (Product Code: SP/MS/001)

70 litre tank with lid filter; 6.8 l/min 12v bypass pump; 2m cable for wiring to ATV electrics; hand lance with 6 metre hose; fixing straps; 1m 3-nozzle boom & mountings

Factory fitted options: 3-way multi-nozzle turrets; boom-end swivel nozzle

Mini-Spray MS006 (Product Code: SP/MS/006)

70 litre tank with lid filter; 11.3 l/min 12v demand pump; tank mounted valve block with control valves for boom and hand lance; agitation; pressure regulation; remote switchbox; hand lance with 6 metre hose; fixing straps; 2m 5-nozzle folding boom and mountings

Factory fitted options: boom-end swivel nozzle: bout marker Mini-Spray MS009 (Product Code: SP/MS/009)

70 litre tank with lid filter and universal ATV mounting frame; 15.1 l/min 12v demand pump; manual 3section tank mounted valve block with control valves for boom sections and hand lance; agitation; pressure regulation; remote switchbox; hand lance with 6 metre hose; fixing straps; 2.5m 6-nozzle 3-section folding boom with break-backs and height adjustment

Factory fitted options: boom-end swivel nozzle; bout marker; 9m retractable hose reel; 3-way multi-nozzle turrets

Demount Sprayers

Mini-Spray 125 litre

125 litre tank, mounting frame & height-adjustable boom mounting; 20.8 l/ min 12v demand pump; manual 3-section tank mounted balanced valve block with control valves for boom sections & hand lance; agitation; pressure regulation; remote switchbox; hand lance with 6 metre hose; fixing straps - with 2.5m 6-nozzle 3-section folding boom (Product Code: SP/MSD/125/009) - with 3.5m 6-nozzle 3-section folding boom (Product Code: SP/MSD/125/009/35)



Factory fitted options: boom-end single or double swivel nozzles; bout marker; 9m retractable hose reel; 3-way multi-nozzle turrets

Midi-Spray 250 litre

250 litre tank with demountable chassis, height-adjustable boom mounting; circuit rinse & eye wash tanks; 3-section balanced valve block; electric spray/agitate on/off, pressure regulation manual control & isolator for each boom section



Standard Specification

- with 4m 3-section folding boom & 26 I/min 12v demand pump (Product Code: SP/MDD/250/12V/ME)

- with 4m 3-section folding boom, 70 I/min AR70 twin diaphragm pump & 3.5HP Briggs & Stratton engine (Product Code: SP/MDD/250/ME)

Factory fitted options: heavy duty 4m boom; 6m standard or heavy duty boom; hand lance with 6m hose or 9m retractable hose reel; bout marker; 3-way multi-nozzle turrets; boom-end single or double swivel nozzles; in-cab full electronic boom section, pressure & agitation controls; chemical induction hopper & can rinse

Professional Specification

with 4m heavy duty 3-section folding boom, 70 l/min AR70 twin diaphragm pump and Honda GX160 4.8HP engine; hand lance with 9m retractable hose reel; in-cab full electronic boom section, pressure & agitation controls; chemical induction hopper & can rinse (Product Code: SP/MDD/250/P/FE)

Factory fitted options: heavy duty 6m boom; hand lance with 6m hose; bout marker; 3-way multi-nozzle turrets; boom-end single or double swivel nozzles; in-cab switch box with electric on/off control of spray/agitation

Midi-Spray 350 litre Details as for 250 litre version

Standard Specification - (Product Code: SP/MDD/350/12V/ME); (Product Code: SP/MDD/350/ME) - both as 250 litre versions above, plus removal support leas as factory-fit option.

Professional Specification - (Product Code: SP/MDD/250/P/FE) - as 250 litre version above, plus removal support legs as standard.

Tractor Mounted Sprayers

Mini-Spray 70 litre

70 litre tank with lid filter, 3-point linkage frame & Category 1 fixings, boom mountings & support stand

1 m boom and hand lance (Product Code: SP/MSM/070/001)

6.8 I/min 12v bypass pump; remote switchbox; 1m 3-nozzle boom Factory fitted options: 3-way multi-nozzle turrets; boom-end swivel nozzle

2.5 m boom and hand lance (Product Code: SP/MSM/070/009)

15.1 I/min 12v demand pump; manual 3-section tank mounted valve block with control valves for boom sections and hand lance; agitation; pressure regulation; remote switchbox; hand lance with 6 metre hose; fixing straps; 2.5m 6-nozzle 3-section folding boom with break-backs and height adjustment

Factory fitted options: boom-end swivel nozzle; bout marker; 9m retractable hose reel; 3-way multi-nozzle turrets; 2m 5 nozzle folding boom

Mini-Spray 125 litre 125 litre tank as Demount version above

1 m boom and hand lance (Product Code: SP/MSM/125/001) as 70 litre version above

2.5 m boom and hand lance (Product Code: SP/MSM/125/009) as 70 litre version above, but with 20.8 l/min pump

3.5 m boom and hand lance (Product Code: SP/MSM/125/009/35) as above, but with 3.5m boom

Specifications: 70 litre tank:

UV stabilised 6mm thick polyurethane; fill level indicator with 10% overfill allowance; Integral sump for easy draining; separate base to protect pump; In-line filter and drain valve; shaped tank end for wrap-around of hand lance hose; quickrelease ratchet straps for mounting to ATV frame (no specialist mountings required). Size: 800 x 310 x 580mm high Hand lance:

Aluminium barrel lance with adjustable nozzle and trigger lock handle: 6 metre flexible hose

1 metre boom (3 nozzles):

Stainless steel spray lines; Air Bubble Jet reduced drift nozzles with independent shut-off body; pressure regulator

2 metre boom (5 nozzles): Stainless steel spray lines; Air Bubble Jet reduced drift nozzles 2.5 metre boom (6 nozzles):

Stainless steel spray lines; Air Bubble Jet reduced drift nozzles with independent shut-off body

Weight (empty): Basic 11kg; MS001 18kg; MS006 24kg; MS009 40ka

Specifications:

125 litre tank:

UV stabilised 6mm thick polyurethane: fill level indicator with 10% overfill allowance; Integral sump for easy draining; In-line filter and drain valve.

Dimensions - Tank: 1100 x 290 x 520mm high; Tank in mounting frame: 1300 x 1150 x 1060mm high

Hand lance:

Aluminium barrel lance with adjustable nozzle and trigger lock handle; 6 metre flexible hose

2.5 metre boom (6 nozzles) and 3.5 metre boom (8 nozzles): Stainless steel spray lines; Air Bubble Jet reduced drift nozzles

with independent shut-off body; break-backs

Weight (empty) with 2.5m boom 52kg; 3.5m boom 54kg

250 and 350 litre tank:

UV stabilised 8mm thick polyurethane; fill level indicator with 10% overfill allowance; large filler lid; Integral sump for easy draining; suction filter and drain valve.

Dimensions -

250 litre tank: 1030mm long, 760mm diameter; Tank in mounting frame: 1030mm wide, 760mm high, 1020mm deep 350 litre tank: 1000mm wide, 700mm deep, 850mm high; Tank in mounting frame: 1300mm wide, 1450mm deep, 1000mm high

Hand lance:

Aluminium barrel lance with adjustable nozzle and trigger lock handle; 6 metre flexible hose

4 metre boom (9 nozzles) and 6 metre boom (13 nozzles):

Standard - stainless steel spray lines; Air Bubble Jet reduced drift nozzles with independent shut-off body; break-backs; heiaht adiustment

Professional- - as standard above, with anti-saa adjustment Weight (empty) with 4m boom (depending on final specification): 250 and 350 litre 80 - 92kg

Specifications:

70 and 125 litre tank: As above Hand lance: As above

1m. 2m. 2.5m and 3.5m booms: As above

Dimensions - Tank only: As above; Tank in mounting frame: 70 litre 64cm wide, 86cm high, 51cm+ deep (depending on boom fitted; 125 litre 113cm wide, 80cm high, 51cm+ deep (depending on boom fitted)

Weight (empty) - 70 litre with 1m boom 16kg; 2.5m boom 29kg; 125 litre with 1m boom 18kg; 2.5m boom 33kg; 3.5m boom 36kg





Compact Sprayer Details and Specifications

Tractor Mounted Sprayers (continued)

Midi-Sprav 200-600 litre

Compact tank mounted on frame; 3-point linkage frame & Category 1 or 2 fixings; circuit rinse & eye wash tank; PTO drive 70 l/min AR70 twin diaphragm pump

Standard Specification

200 litre tank, 4 m boom (Product Code: SP/MDM/200/ME)

4m 3-section folding boom with break-backs & height adjustment, 3-section balanced valve block with electric spray/agitate on/off, manual control of pressure regulation & isolator for each boom section

Factory fitted options: Heavy duty 4m boom, as standard above but with anti-saa adjustment; 6m

standard or heavy duty boom or 8m heavy duty boom; hand lance with 6m hose or 9m retractable hose reel; bout marker; 3 -way multi-nozzle turrets; boom-end single or double swivel nozzles; in-cab full electronic boom section, pressure & agitation controls; chemical induction hopper & can rinse

300 litre tank, 4 m boom (Product Code: SP/MDM/300/ME) - as 200 litre version above

Professional Specification

400 litre tank, 4 m boom (Product Code: SP/MDM/400/P/FE)

As Standard Specification above, but with in-cab full electronic boom section, pressure & agitation controls, heavy duty 4m boom, as standard above but with anti-sag adjustment, 9m retractable hose reel with hand lance, chemical induction hopper with can rinse

Factory fitted options: Heavy duty 6m boom; 8m boom with height adjusting winch and handle; in-cab switch box with electric on/off control of spray/agitation; hand lance with 6m hose; bout marker; 3-way multi-nozzle turrets; boom-end single or double swivel nozzles

500 litre tank, 4 m boom (Product Code: SP/MDM/500/P/FE) - as 400 litre version above 600 litre tank, 4 m boom (Product Code: SP/MDM/600/P/FE) - as 400 litre version above

Trailed Sprayers

Mini-Spray 70 & 125 litre

70 or 125 litre tank mounted on trailed chassis with adjustable boom height mountings, ball hitch trailer coupling, roller bearing trailer wheels & LGP tyres

70 litre, 2.5m boom & hand lance (Product Code: SP/MST/070/009) - with 12v 15.1 l/min pump

125 litre, 2.5m boom & hand lance (Product Code: SP/MST/125/009) - with 12v 20.8 l/min pump

125 litre, 3.5m boom & hand lance (Product Code: SP/MST/125/009/35) - with 12v 20.8 I/min pump Remote switchbox; tank mounted valve block, with pressure regulation, agitation and control valves for

boom and hand lance: 2.5 or 3.5m 3-section folding boom with break-backs & height adjustment Factory fitted options: 9m retractable hose reel with hand lance; bout marker; 3-way multi-nozzle turrets; boom-end single or double swivel nozzles

Midi-Spray 250 litre

250 litre tank with trailed chassis as 70 & 125 litre above, plus circuit rinse and eye-wash tanks

Standard Specification

4 m boom, 12v (Product Code: SP/MDT/250/12V/ME) - with 12 volt 26 I/min pump, and as 200 litre Tractor Mounted Standard Specification above.

Factory fitted options: as 200 litre Tractor Mounted Standard Specification above (but not chemical induction hopper) 4 m boom, Engine Drive (Product Code: SP/MDT/250/ME) - as above, with 70 I/min AR70 twin diaphragm pump and chassis mounted 3.5HP Briggs & Stratton engine

Professional Specification

4 m boom, Engine Drive (Product Code: SP/MDT/250/P/FE) - as Standard Specification (above) but with Honda GX160 4.8HP engine, in-cab full electronic controls, heavy duty 4m boom, 9 metre retractable hose reel with hand lance Factory fitted options: as 400 litre Tractor Mounted Professional Specification above.

Pedestrian Sprayers

Micro-Spray 120 litre

120 litre tank seated into strong mounting frame attached to 3-wheel chassis: 23 I/min 24 volt pump with pressure regulation, agitation & control valves; variable speed forward and reverse drive unit with electric controls in the steering handle; master control box mounted at front of sprayer within easy reach of the operator



Specifications:

120 litre tank: As 125 litre on previous page Battery: dual agm batteries - up to 5 hours continuous use. Battery charger included

2.5m and 3.5m booms: As Trailed above

Dimensions - max. width (boom folded) 760mm; wheel width 690mm; 1310mm long; 876mm high (without handle upright) Weight (empty): 70kg

Specifications: 70 and 125 litre tank: As previous page

Specifications: 200-600 litre tank:

draining; suction filter and drain valve.

500 litre 175kg; 600 litre 200kg

4 m. 6 m & 8 m booms:

backs; height adjustment

adjusting winch and handle

trigger lock handle; 6 metre flexible hose

Dimensions (in frame, with 4m boom folded) -

Hand lance: Aluminium barrel lance with adjustable nozzle and trigger lock handle; 6 metre flexible hose

UV stabilised 8mm thick polyurethane; fill level indicator with

10% overfill allowance; large filler lid; Integral sump for easy

200 litre tank: 1300mm long, 1550mm wide, 1400mm high

300 litre tank: 1300mm long, 1550mm wide, 1400mm high

400 litre tank: 1450mm long, 1560mm wide, 1900mm high

500 litre tank: 1450mm long, 1560mm wide, 1900mm high

600 litre tank: 1450mm long, 1560mm wide, 1900mm high

Weight (empty) with 4m boom (depending on final

specification): 200 litre 120kg; 300 litre 135kg; 400 litre 150kg;

Hand lance: Aluminium barrel lance with adjustable nozzle and

Standard (4 & 6m) - stainless steel spray lines; Air Bubble Jet

reduced drift nozzles with independent shut-off body; break-

Professional (4 & 6m) - as standard above, but heavy duty with

anti-sag adjustment; 8m - as 6m Professional with height

2.5m and 3.5m booms: stainless steel spray lines; Air Bubble Jet reduced drift nozzles with independent shut-off body; breakbacks

Dimensions - on trailed chassis (with boom folded): 1150mm wide, 1060mm high, 1300mm long

Weight (empty): 70 litre with 2.5m boom 29kg: 125 litre with 2.5m boom 76kg; 3.5m boom 79ka

250 litre tank with 4m boom - 12v 170kg; Engine 190kg 4 m . 6 m & 8 m booms:

Standard (4 & 6m) - stainless steel spray lines; Air Bubble Jet

reduced drift nozzles with independent shut-off body; breakbacks; height adjustment

Professional (4 & 6m) - as standard above, but heavy duty with anti-sag adjustment; 8m - as 6m Professional with height adjusting winch and handle

Dimensions: 2300mm long, 1520mm wide, 1700mm high

2.5m boom (Product Code: SP/MC/120/P/25) 3.5m boom (Product Code: SP/MC/120/P/35)

Factory fitted options: 9m retractable hose reel with hand lance; bout marker; 3-way multi-nozzle turrets; boom-end single or double swivel nozzles

Martin Lishman Compact Sprayers are designed and manufactured in the UK by Martin Lishman Ltd

© All designs copyright Martin Lishman Ltd. We reserve the right to alter product specifications at any time without notice.

Mini-Spray, Midi-Spray and Micro-Spray are Trademarks of Martin Lishman Ltd. All business is subject to our terms and conditions. A full copy can be supplied on request. © Martin Lishman Ltd October 2020

Martin Lishman Ltd

Unit 2B, Roman Bank, Bourne, Lincs, PE10 9LQ, UK T: +44 (0)1778 426600

E-mail: sales@martinlishman.com

www.martinlishman.com

👿 @Martin_Lishman

f/martinlishmanltd



